





HUEGLI TECH AG (LTD)
The Engine & Genset Control Company

InteliLite



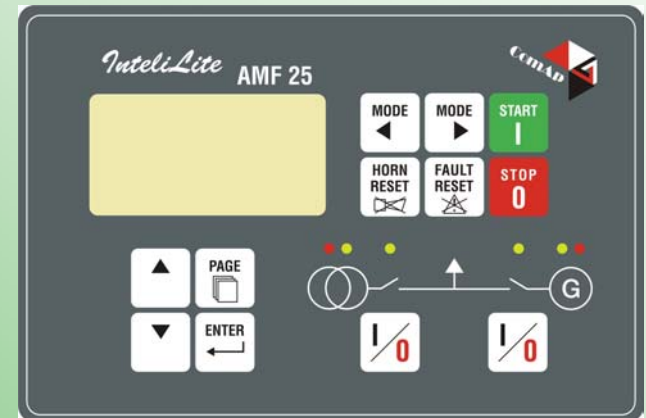

Product Tree

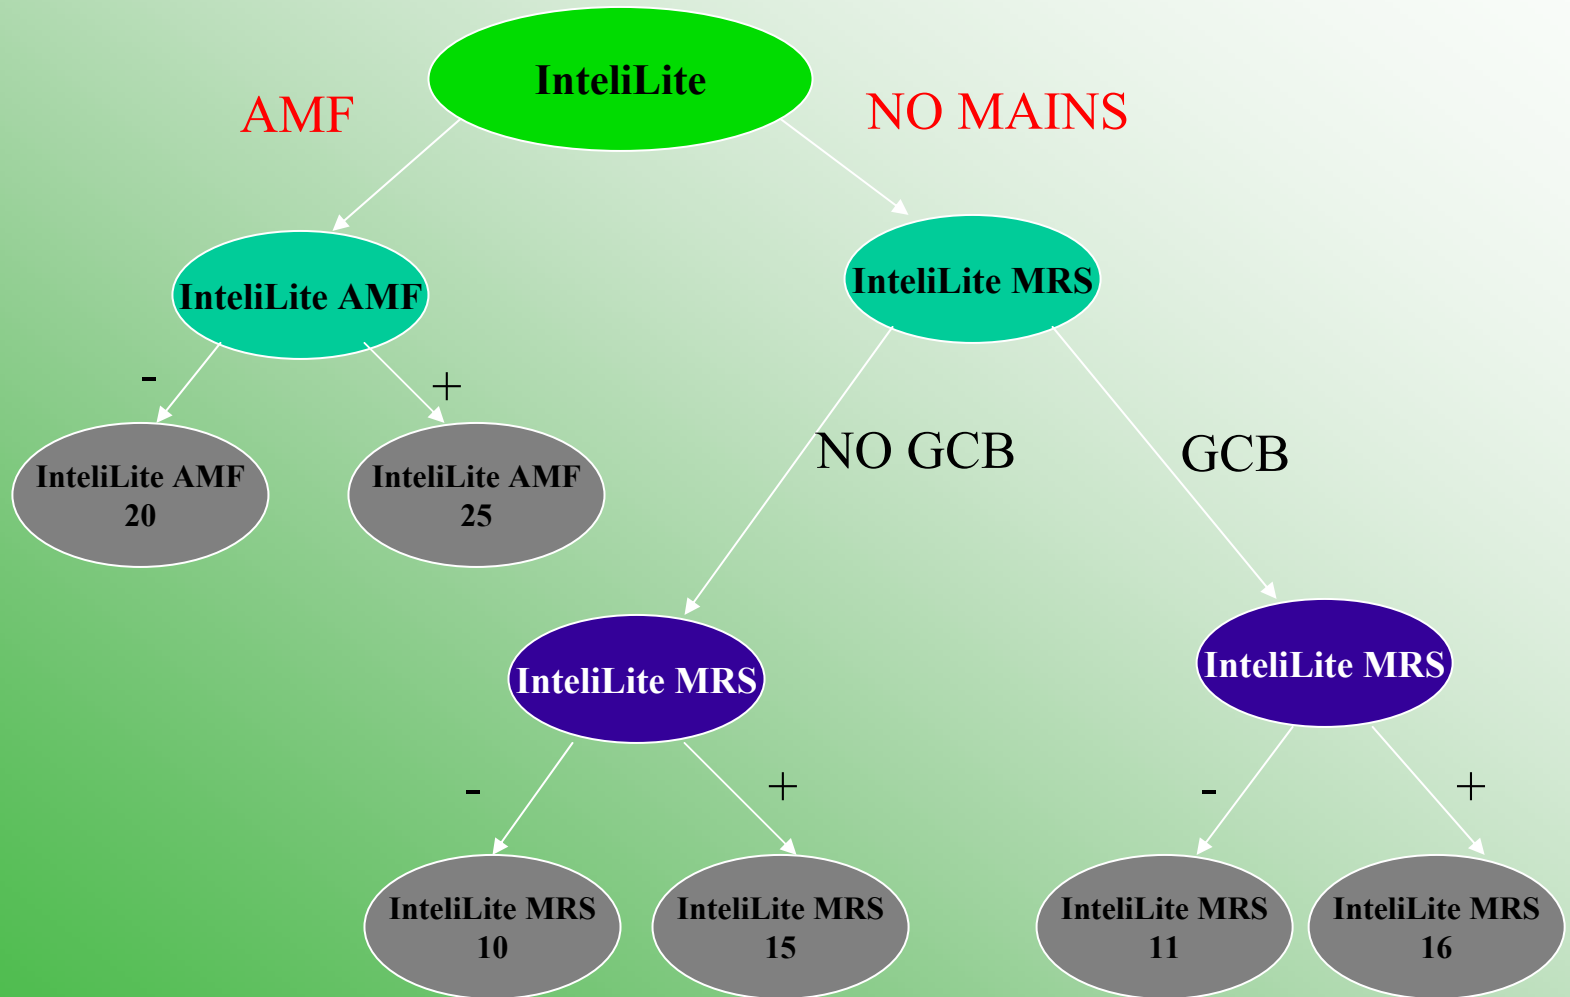



Basic and extended version

BASIC
10,11,20

Input/Output Configuration
I, U, kW measurement
RS232 for PC connection
D+, 2 x N terminals

EXTENDED
15,16,25


Modem support
GSM modem support
IGL-RA15 alarm annunciator Support
kWh measurement
IDMT protection

InteliGen

Active Calls, SMS, iG-IB,iG-MU
History, Multi-password,
MiltiSet Support, Parallel operation
Additional I/O




IL – MRS 10/15

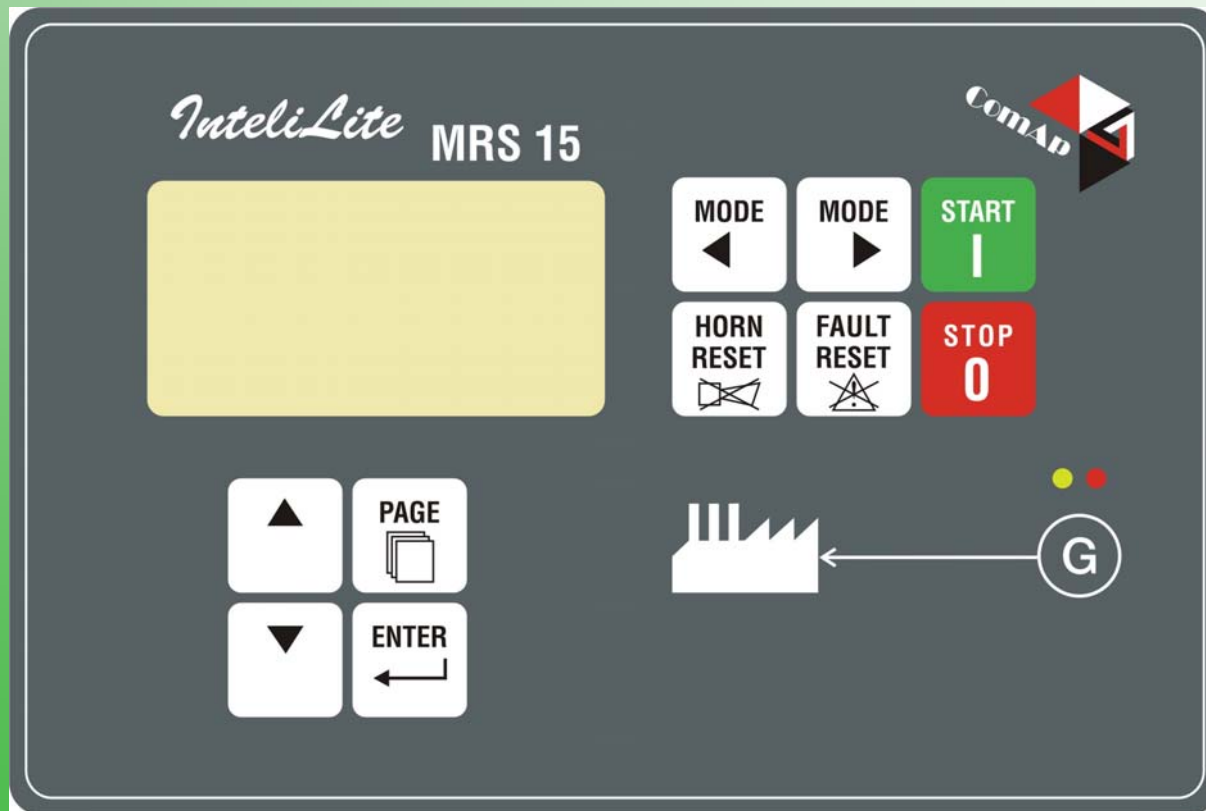




IL – MRS 11/16

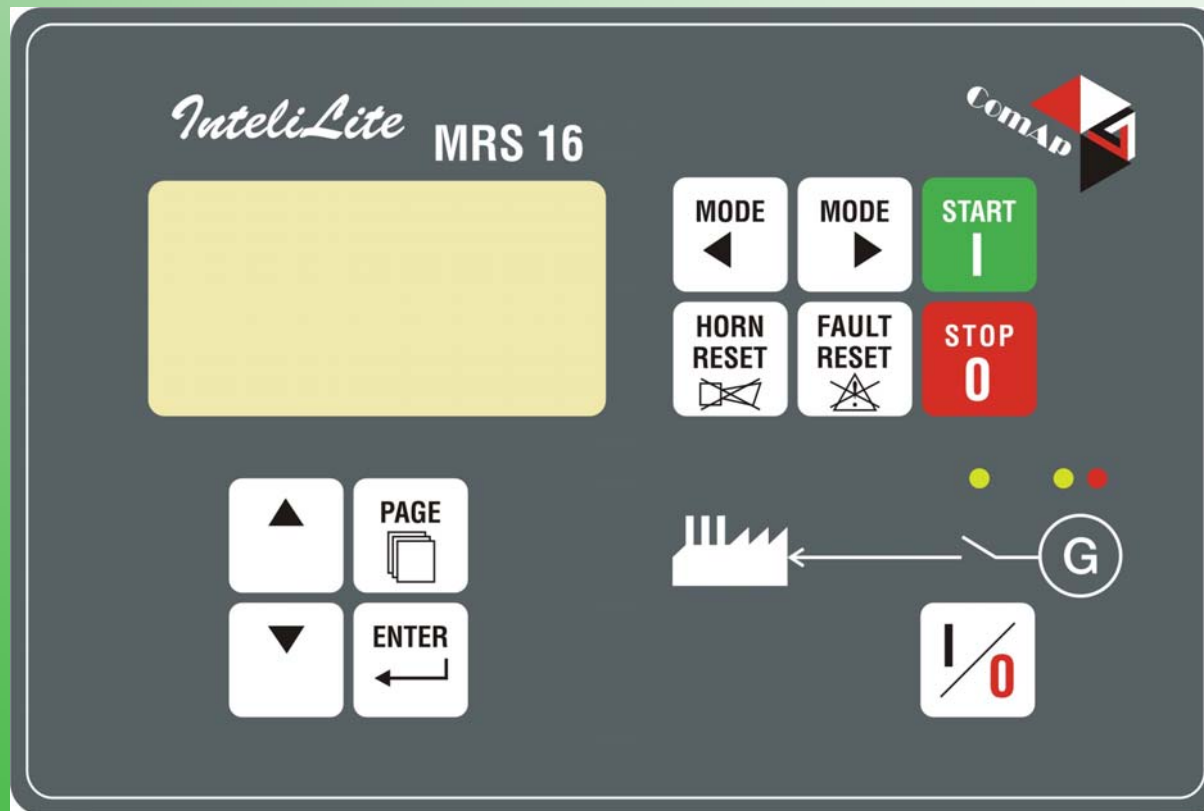




IL – MRS 10/15

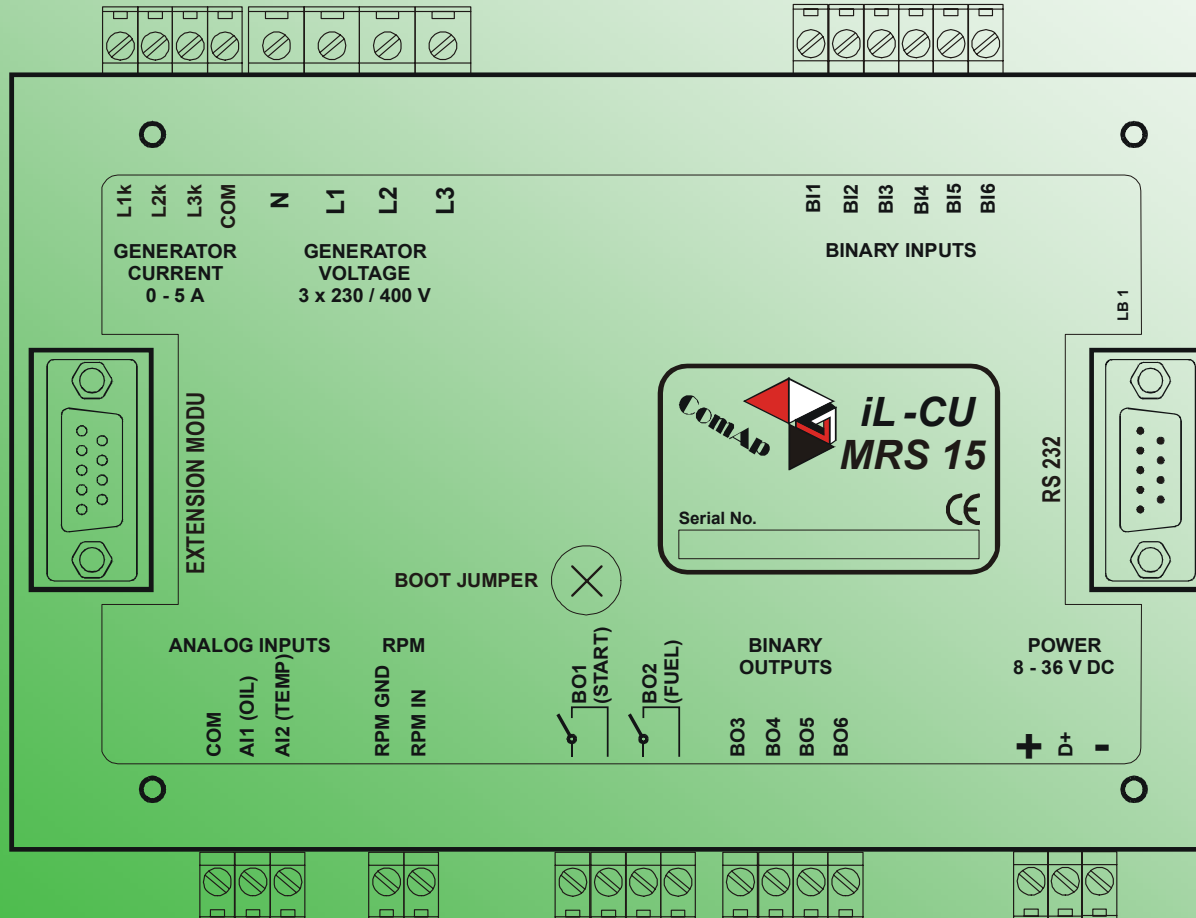




IL – AMF 20/25

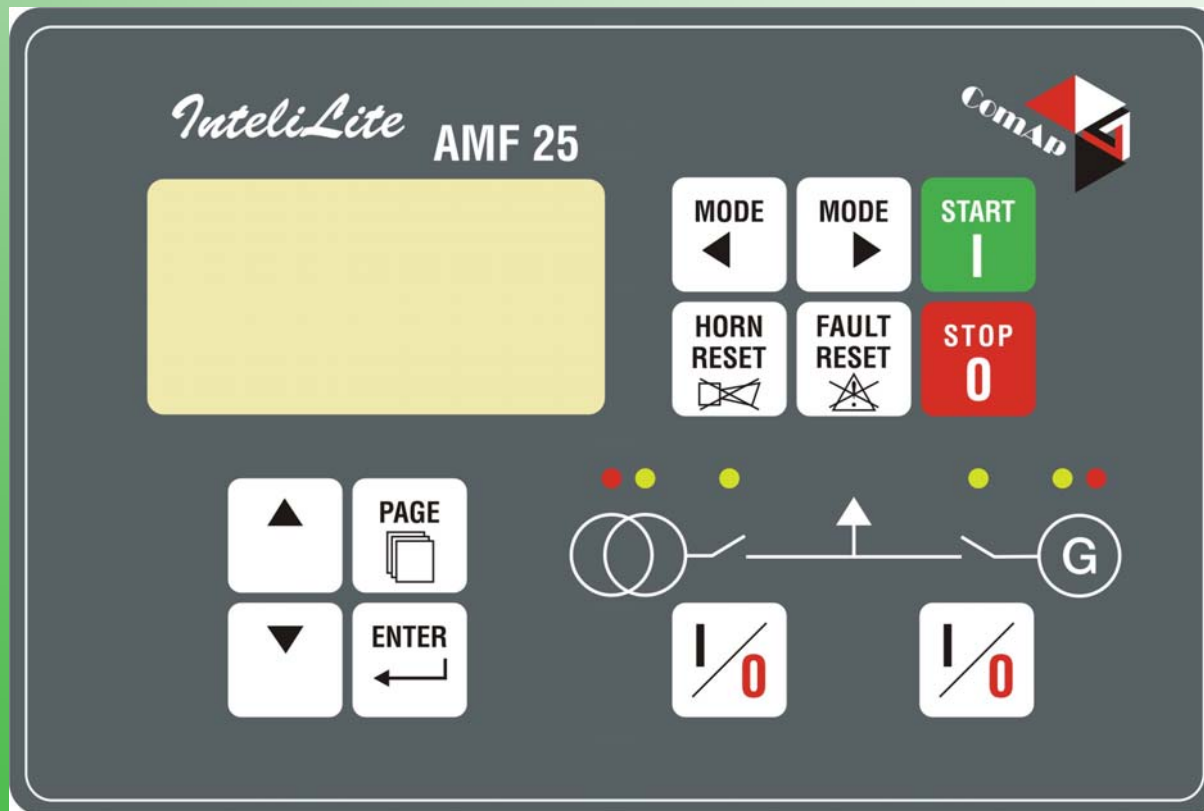



IL – AMF 20/25

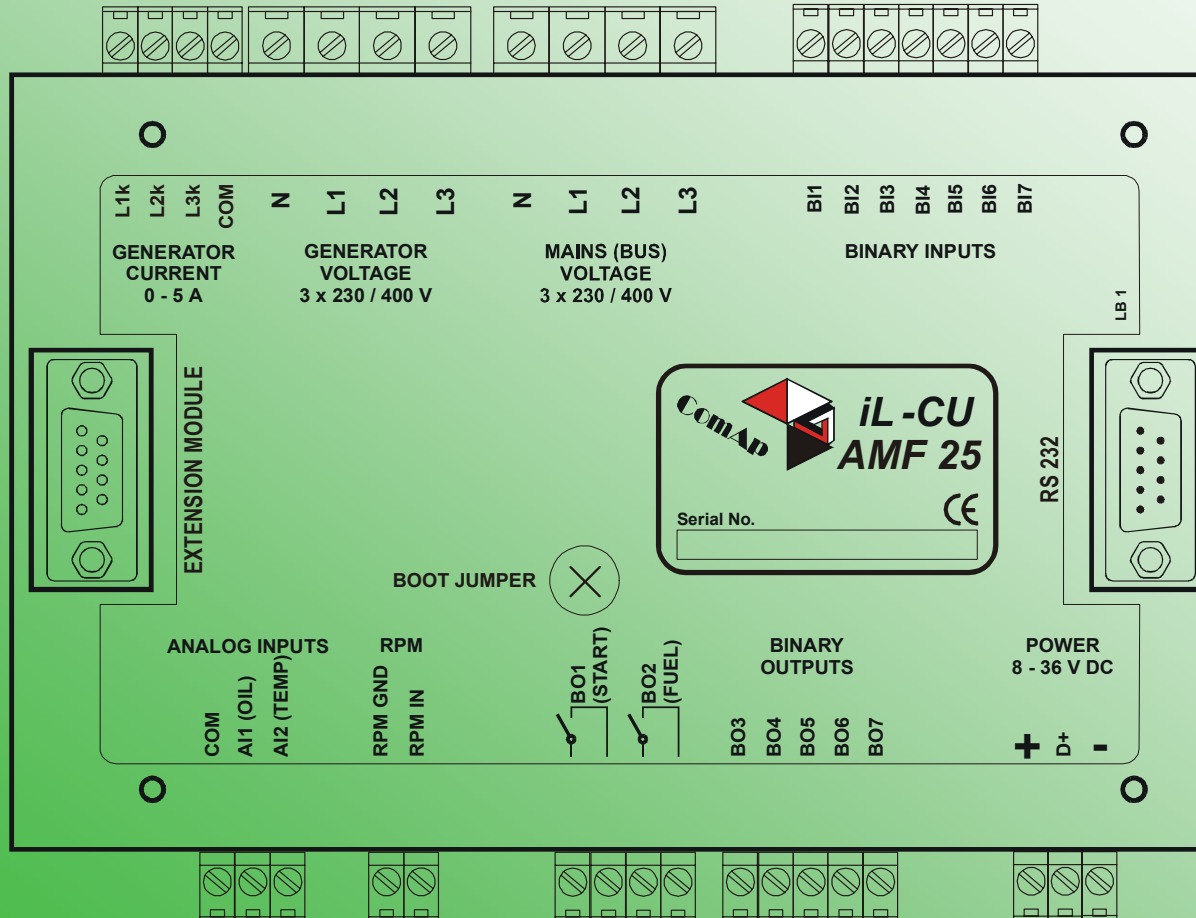



PC Software LiteEdit

LiteEdit


I/O Configuration
Direct / Modem / Off line connection
Control window
Setpoints adjustment
Values
Data export

WinEdit

History
Active call support
Site/Engine file structure
Select configuration



Remote Display, case study

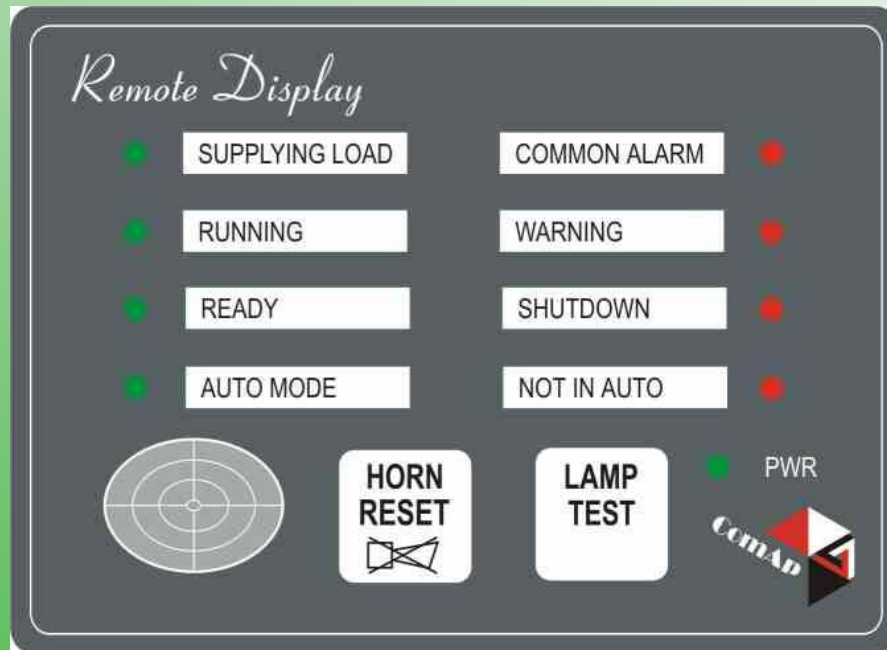

Max. distance 200m

Multicolor LEDs

Same configuration as iG-IOM



Remote Display, case study

